

5010 Series LED Floodlight



Features

- Shock proof UV protected PC lens
- IP66 ingress protection
- 50.000 hrs L70 performance
- Passive cooling with aluminum body
- Up to %50 energy saving
- 220-240V input voltage, optional 6kV surge withstand
- Active PFC >0.95 and THD < %10 with input filtering circuits
- EN60598 compliant
- 3000K, 4000K, 6500K, CRI >80
- -20C +45C operating temp.

Applications

- Facade lighting, area lighting


Options

- 2700K, 5700K
- 12, 30, 60, 75, street beam angles

Product ID	Power	Light Flux	Weight	Length
5010-026	26.0W	4020LM	1250gr	249mm
5010-052	52.0W	8040LM	1600gr	423mm


⊕ ⊖ IK08 IP66 CE 850°C

Light Distributions

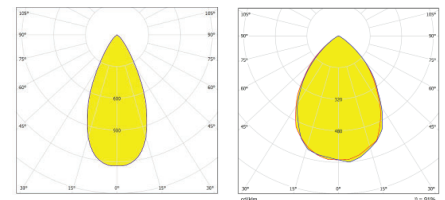

5010-XXX-060

5010-XXX-075

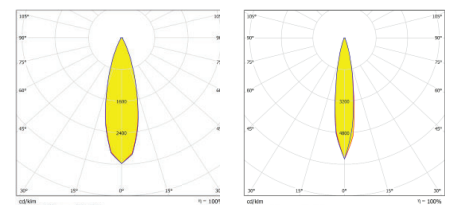

5010-XXX-030
Dimensions

5010-XXX-012

