

# 9707 Series Square Adjustable Recessed LED Downlight



## Features

- 50.000 hrs L70 performance
- Flicker-free
- 15, 24, 36, 48, 60 beam angle anodized aluminum reflector
- Tempered glass
- Up to %50 energy saving
- 220-240V input voltage
- Active PFC >0.9 and THD < %10 with input filtering circuits
- EN60598 compliant
- 3000K, 4000K, 6500K, CRI >80
- 30 degree tiltable
- Cut-out size 180x180mm,

334x180mm, 493x180mm

## Applications

- Accent lighting



## Options

- 2700K, 3000K 90CRI, Pure White
- Pure frame version
- Custom paint based on customer RAL color code
- 1hr, 3hrs emergency kit option
- DALI

Product ID	Power	Light Flux	Dimensions			Weight
			A	B	C	
9707-119	20.0W	1950LM	197	197	95	1000gr
9707-219	40.0W	3900LM	351	197	95	2000gr
9707-319	60.0W	5850LM	510	197	95	3000gr
9707-130	31.0W	3200LM	197	197	95	1000gr
9707-230	62.0W	6400LM	351	197	95	2000gr
9707-330	93.0W	9600LM	510	197	95	3000gr
9707-140	37.0W	3700LM	197	197	95	1000gr

IK05 IP40 CE 850°C

## Light Distributions

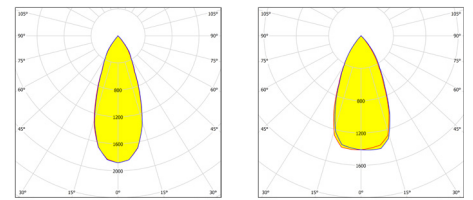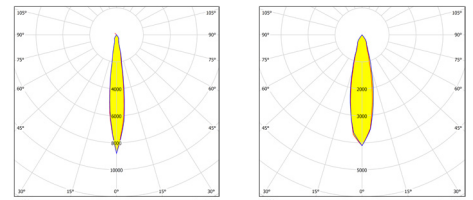

## Dimensions

