

DN Series 24V T8 LED Tubes



Features

- Up to 2200 lm
- 20-28V input constant voltage range
- Flicker-free
- %50 energy saving
- Aluminum heatsink
- New generation high efficiency LEDs
- Low maintenance costs
- EN62031 certified
- CRI >80



- Min 50.000 on/off cycles

Applications


- Vehicle lighting
- Machine lighting

Options


- Metal ve rotating 26mm dia. end cap
- 2700K, 5700K

Class III ▽ IK08 IP40 CE 850°C

Light Distributions

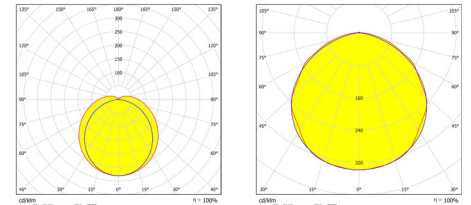

Dimensions



	A	B	C	Weight
DN15 Series	1499mm	1513mm	28mm	355gr
DN12 Series	1199mm	1213mm	28mm	355gr
DN09 Series	893mm	907mm	28mm	275gr
DN06 Series	589mm	603mm	28mm	200gr

DN Series 1500mm T8 LED Tubes

Product ID	Input Voltage V	Power	Energy Class	Life Hours	Operating Temp	Light Flux	Front Cover	CCT
DN15-360-65T	24V/0.91A	22.5W	F	40.000	-30C +45C	2300LM	Transparent	6500K
DN15-360-40T	24V/0.91A	22.5W	F	40.000	-30C +45C	2300LM	Transparent	4000K
DN15-360-30T	24V/0.91A	22.5W	F	40.000	-30C +45C	2150LM	Transparent	3000K
DN15-360-65F	24V/0.91A	22.5W	F	40.000	-30C +45C	2100LM	Opaque	6500K
DN15-360-40F	24V/0.91A	22.5W	F	40.000	-30C +45C	2100LM	Opaque	4000K
DN15-360-30F	24V/0.91A	22.5W	G	40.000	-30C +45C	1950LM	Opaque	3000K

DN Series 895mm T8 LED Tubes

Product ID	Input Voltage V	Power	Energy Class	Life Hours	Operating Temp	Light Flux	Front Cover	CCT
DN09-225-65T	24V/0.57A	13.5W	F	40.000	-30C +45C	1320LM	Transparent	6500K
DN09-225-40T	24V/0.57A	13.5W	F	40.000	-30C +45C	1320LM	Transparent	4000K
DN09-225-30T	24V/0.57A	13.5W	F	40.000	-30C +45C	1210LM	Transparent	3000K
DN09-225-65F	24V/0.57A	13.5W	F	40.000	-30C +45C	1200LM	Opaque	6500K
DN09-225-40F	24V/0.57A	13.5W	F	40.000	-30C +45C	1200LM	Opaque	4000K
DN09-225-30F	24V/0.57A	12.0W	G	40.000	-30C +45C	1100LM	Opaque	3000K

DN Series 1200mm T8 LED Tubes

Product ID	Input Voltage V	Power	Energy Class	Life Hours	Operating Temp	Light Flux	Ön Kapak	CCT
DN12-300-65T	24V/0.75A	18.0W	F	40.000	-30C +45C	2000LM	Transparent	6500K
DN12-300-40T	24V/0.75A	18.0W	F	40.000	-30C +45C	2000LM	Transparent	4000K
DN12-300-30T	24V/0.75A	18.0W	F	40.000	-30C +45C	1830LM	Transparent	3000K
DN12-300-65F	24V/0.75A	18.0W	F	40.000	-30C +45C	1800LM	Opaque	6500K
DN12-300-40F	24V/0.82A	18.0W	F	40.000	-30C +45C	1800LM	Opaque	4000K
DN12-300-30F	24V/0.82A	18.0W	G	40.000	-30C +45C	1650LM	Opaque	3000K

DN Series 590mm T8 LED Tubes

Product ID	Input Voltage V	Power	Energy Class	Life Hours	Operating Temp	Light Flux	Front Cover	CCT
DN06-150-65T	24V/0.38A	9.0W	F	40.000	-30C +45C	1000LM	Transparent	6500K
DN06-150-40T	24V/0.38A	9.0W	F	40.000	-30C +45C	1000LM	Transparent	4000K
DN06-150-30T	24V/0.38A	9.0W	F	40.000	-30C +45C	915LM	Transparent	3000K
DN06-150-65F	24V/0.38A	9.0W	F	40.000	-30C +45C	900LM	Opaque	6500K
DN06-150-40F	24V/0.38A	9.0W	F	40.000	-30C +45C	900LM	Opaque	4000K
DN06-150-30F	24V/0.38A	9.0W	G	40.000	-30C +45C	825LM	Opaque	3000K