


# DK-DB LED Bar

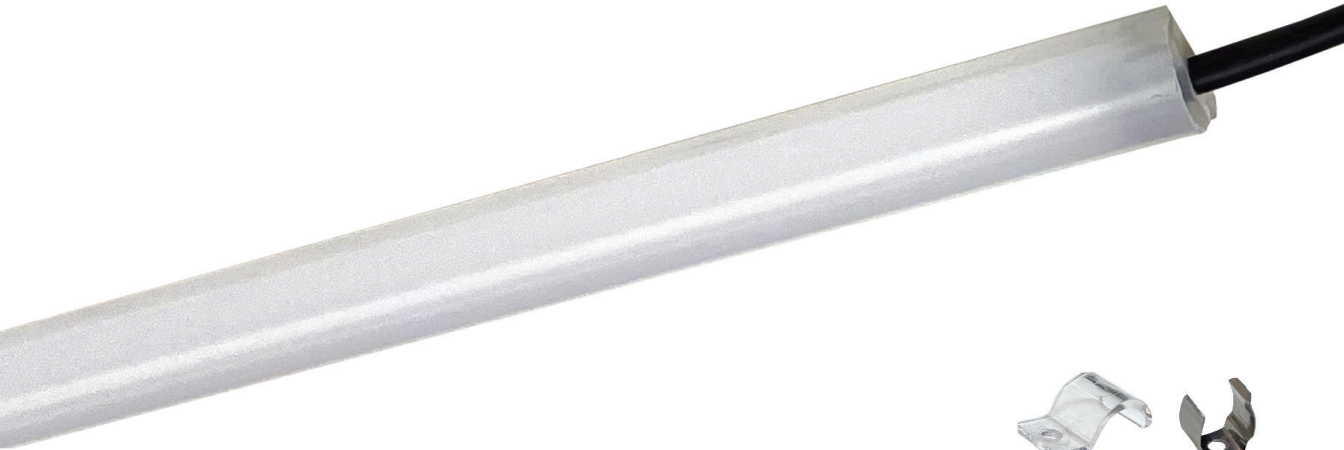

## Features


- Continuous linear lighting
- Up to %50 energy saving
- Shock proof PC front cover
- EN62031 compliant
- 3000K, 4000K, 6500K, CRI >80
- Min 50.000 on/off cycles
- 24V operating voltage

## Options

- 2700K, 5700K, meat color
- Custom lenghts 75mm multiples

Class III ▽ IK08 IP67 CE 850°C

Light Distributions



## Applications

- Undershef lighting, cove lighting



Product ID	Input Voltage	Power	Life Hours	Operating Temp.	Light Flux	Dimension B	C	Weight	
DK Series	24V	10.0W/m	50.000	-30C +45C	1280LM/m	13.3	9.2	115gr/m	
DB Series	24V	5.0W/m	50.000	-30C +45C	640LM/m	13.3	9.2	115gr/m	

Dimensions

